


# alferbal

## DRIP EDGE PROFILE AND ACCESSORIES MADE OF ALUMINIUM

# alferpro®

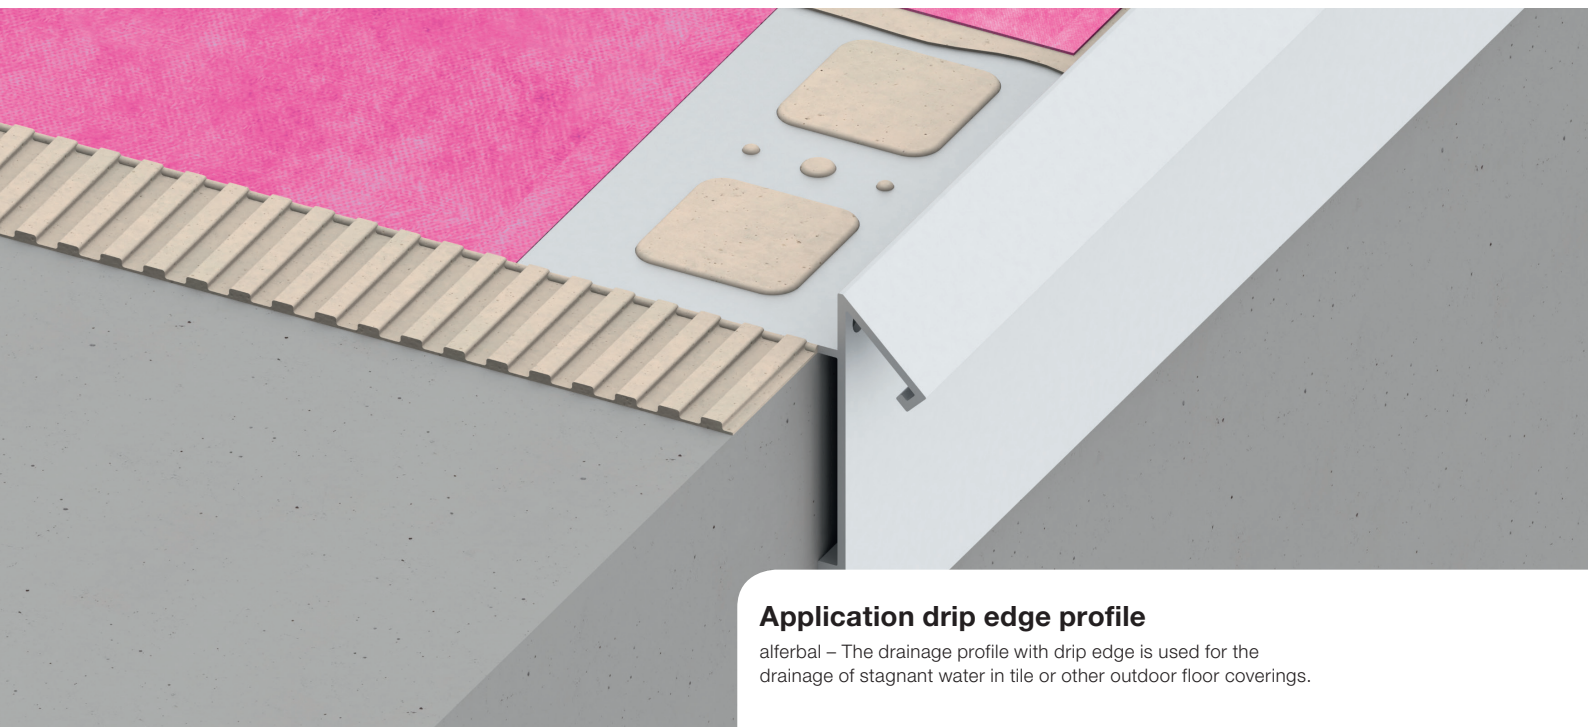

### Application drip edge profile

alferbal – The drainage profile with drip edge is used for the drainage of stagnant water in tile or other outdoor floor coverings.

### DESIGNED TO MEET THE SPECIAL REQUIREMENTS ON TERRACES AND BALCONIES.

Designed with ruggedness in mind, alferbal series defy any weather. Regardless of whether in new construction or for a subsequent renovation, the profiles protect the sensitive border areas effectively against rain and storms. The drainage profiles can drain the water and moisture quickly.

### TECHNICAL SPECIFICATIONS

Material number: EN AW 6060-T66


All information is approximate. Since we can not assume liability for special applications, a corresponding suitability test must always be carried out by the customer.

### PROCESSING

Choose the drip edge profile according to the tile thickness. Apply the tile adhesive to the edge of the surface to be tiled with a notched trowel. Press in and align the drip edge profile in the damp tile adhesive. Cover the attachment leg completely with glue. Press in and align the tile so that it matches the top of the profile.

ANODISED


ALUMINIUM



### CONNECTOR

NATURAL


ALUMINIUM



### OUTER AND INNER CORNER PIECE

ANODISED

ALUMINIUM



## DRIP EDGE PROFILE AND ACCESSORIES MADE OF ALUMINIUM

---

### DELIVERY FORM

The profiles are available in heights:  
11; 13; 15; 23mm  
depending on the surface (see catalog).

The profiles are available in lengths:  
300 cm  
depending on the surface (see catalog).

The accessories are available in heights:  
11; 13; 15; 23mm  
depending on the surface (see catalog).

### SURFACES

Anodised, natural

### PACKING UNIT

Profiles:  
PU 1 = 10 pcs, PU 2 = 50 pcs, PU 3 = 150 pcs

Accessories:  
Blister = 1 pc

### PROCESSING, CARE, CLEANING

The following points must be observed in order to prevent damage on the profiles surfaces:

- The processing instructions of the tile adhesive must always be observed.
- Any excess of grout, mortar and tile adhesive on the profile surface should be removed immediately with water.
- Allow to dry out thoroughly, ensuring the area is well ventilated.
- The protective film or similar, used for the installation, can only be removed after the paving has dried completely.
- The profiles and accessories are cleaned with a damp cloth and pH-neutral cleaning agents. Please do not use alkaline products.

### MATERIAL AND CARE INSTRUCTIONS

Suitable for outdoor use with low to medium mechanical stress. Deformation of the profiles can lead to discolouration on the shaped edges. The anodized coating is scratch-sensitive, damage can be repaired with varnish. Staining by oxidation possible: protect material from contact with adhesive and mortar residues.

### STORAGE AND TRANSPORT

The profiles should be protected against external impact and abrasion.

### DISPOSAL

The profiles can be supplied to aluminium recycling.

### SPECIAL NOTE

#### Warranty and disclaimer

The application examples and tips shown in this data sheet and on our website are guidelines based on conventional crafting techniques. All information, including product-related information is standard. The author excludes any warranty for the information given in the data sheet and on the website. For the usability of products for specific purposes and for the occurrence of damage or the occurrence of defects by the information or tips given here, no warranty is also accepted. Errors, misprints and technical changes - as far as they serve the progress - reserved. Photos and illustrations are not binding. No liability for printing and image defects. Imitation and reprinting, even in part, is not permitted.

As of: 05/2019