


# alferstep

ALFERPROSTEP STEP EDGE PROFILE  
MADE OF ALUMINIUM

# alferpro®

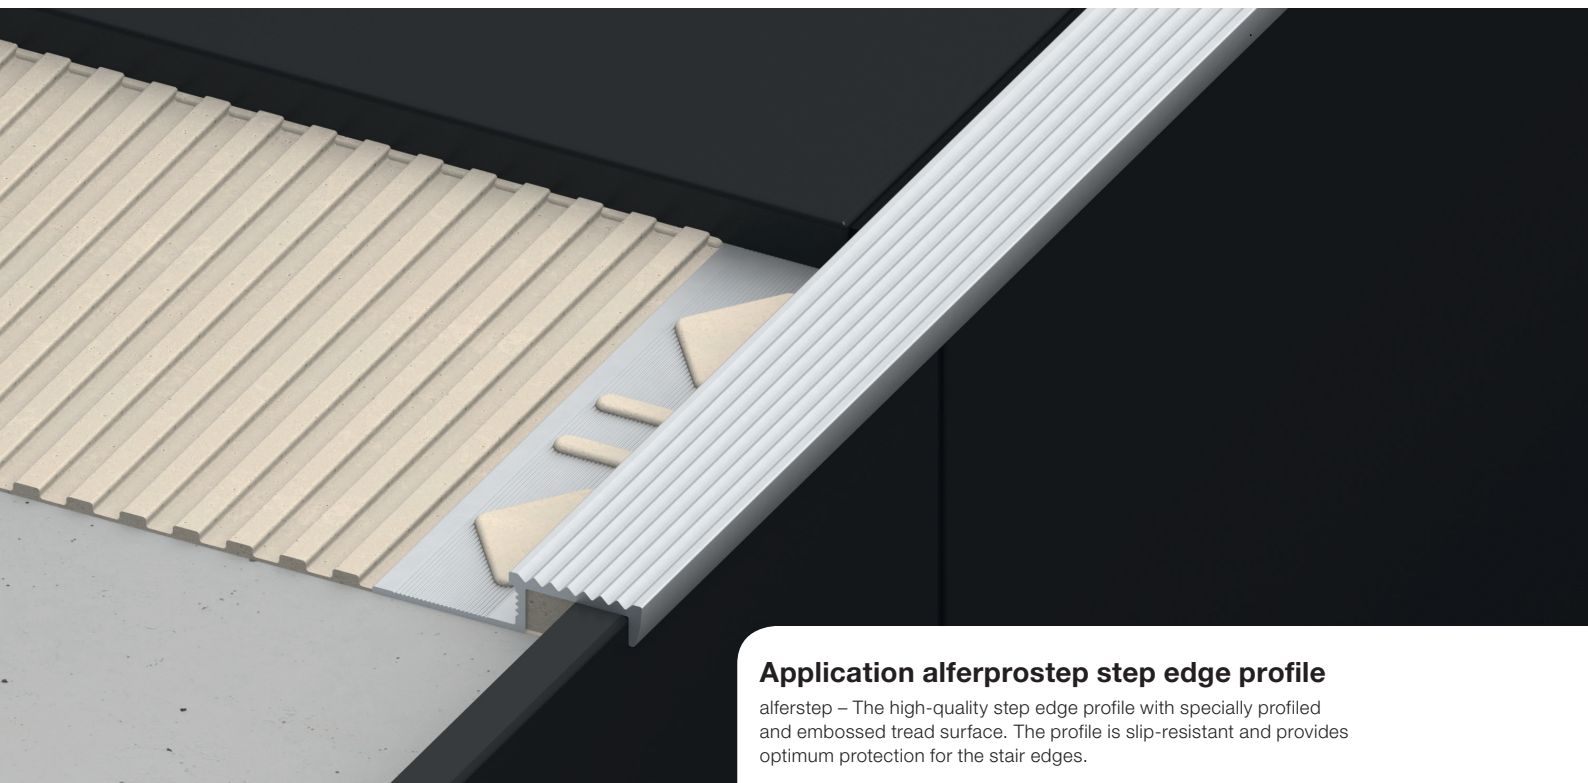

## Application alferprostep step edge profile


alferstep – The high-quality step edge profile with specially profiled and embossed tread surface. The profile is slip-resistant and provides optimum protection for the stair edges.

## FORM MEETS FUNCTION: STYLE ELEMENT AND SAFETY FACTOR AT ONCE.

Stairs are a defining design element in architecture. The steps provide creative transitions and structure to the space. alferstep combines visual requirements with functional needs. Step edge profiles increase tread safety and protect the edge at the same time against mechanical stresses.

ANODISED

ALUMINIUM



## TECHNICAL SPECIFICATIONS

AlMgSi0,5  
Material number: 33.206

All measures, weights and loads as indicated in this data sheet are approximate figures. We can not assume liability for any special applications as well as damage resulting from improper assembly or use, a corresponding suitability test must always be carried out by the customer.

## PROCESSING

Choose the alferprostep step edge profile according to the tile thickness. Apply the tile adhesive to the edge of the surface to be tiled with a notched trowel. Press in and align the alferprostep step edge profile in the damp tile adhesive. Cover the attachment leg completely with glue. Press in and align the tile so that it matches the top of the profile.

### DELIVERY FORM

The profiles are available in heights:  
8; 10; 11; 12,5mm  
depending on the surface (see catalog).

The profiles are available in lengths:  
150; 250cm  
depending on the surface (see catalog).

### SURFACES

Anodised

### PACKING UNIT

PU 1 = 10 pcs, PU 2 = 50 pcs, PU 3 = 150 pcs

### PROCESSING, CARE, CLEANING

The following points must be observed in order to prevent damage on the profiles surfaces:

- The processing instructions of the tile adhesive must always be observed.
- Any excess of grout, mortar and tile adhesive on the profile surface should be removed immediately with water.
- Allow to dry out thoroughly, ensuring the area is well ventilated.
- The protective film or similar, used for the installation, can only be removed after the paving has dried completely.
- The profiles and accessories are cleaned with a damp cloth and pH-neutral cleaning agents. Please do not use alkaline products.

### MATERIAL PROPERTIES

Aluminium alferprostep step edge profiles are suitable for low to medium mechanical loads in indoor and outdoor areas and have a high resistance to chemicals.

### STORAGE AND TRANSPORT

The profiles should be protected against external impact and abrasion.

### DISPOSAL

The profiles can be supplied to aluminium recycling.

### SPECIAL NOTE

#### Warranty and disclaimer

The application examples and tips shown in this data sheet and on our website are guidelines based on conventional crafting techniques. All information, including product-related information is standard. The author excludes any warranty for the information given in the data sheet and on the website. For the usability of products for specific purposes and for the occurrence of damage or the occurrence of defects by the information or tips given here, no warranty is also accepted. Errors, misprints and technical changes - as far as they serve the progress - reserved. Photos and illustrations are not binding. No liability for printing and image defects. Imitation and reprinting, even in part, is not permitted.

As of: 05/2020