


TILE ANGLE PROFILE MADE OF ALUMINIUM

alferpro[®]

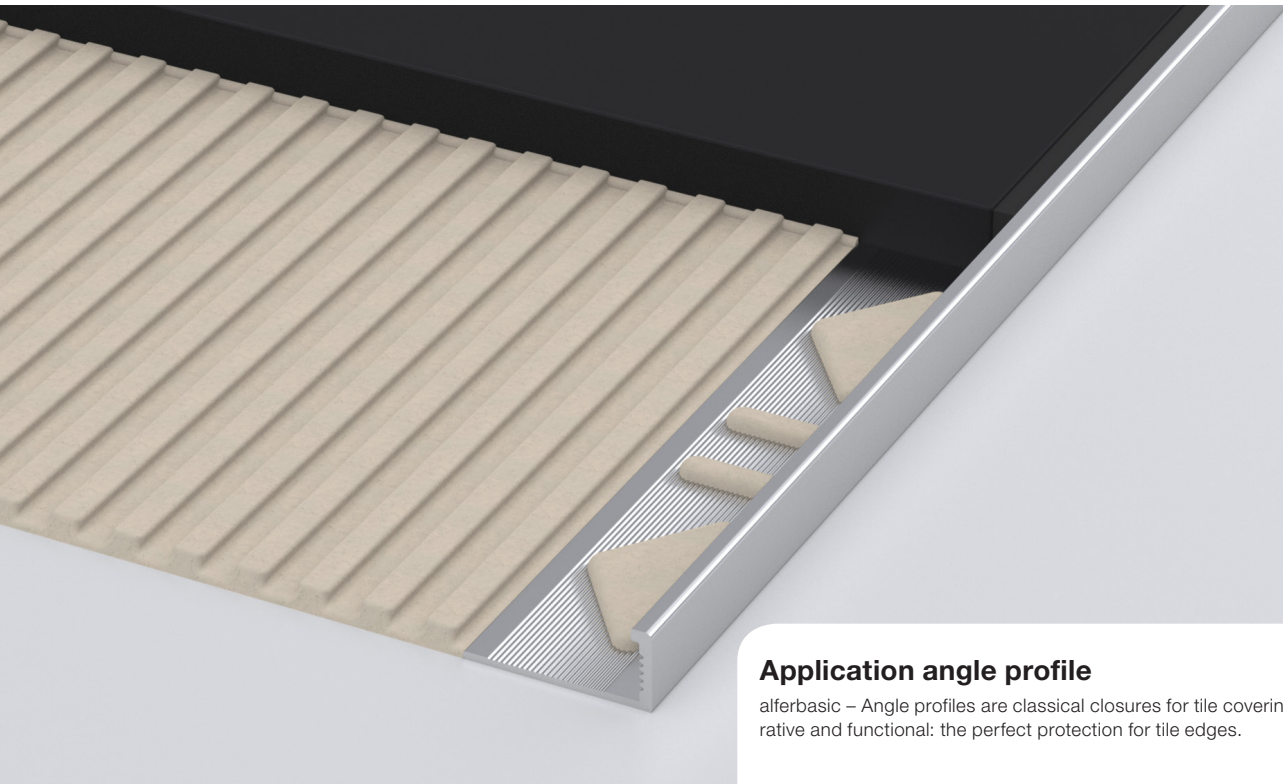

Application angle profile

alferbasic – Angle profiles are classical closures for tile coverings. Decorative and functional: the perfect protection for tile edges.

THE FINISHING TOUCHES FOR TILES, PARQUET, LAMINATE, DESIGN FLOORS OR CARPET.

Whether as a closure or transition between coverings, the profiles of the alferbasic series protect the tile edges and create an elegant look. A variety of options, materials and finishes offers the right product for you for every application. Whether functionally elegant or cosily rustic, the profiles fit into any environment. They can be cleverly placed even according to the designer's touch.

TECHNICAL SPECIFICATIONS

EN AW 6060 AlMgSi0,5
Material number: 3.3206

All measures, weights and loads as indicated in this data sheet are approximate figures. We can not assume liability for any special applications as well as damage resulting from improper assembly or use, a corresponding suitability test must always be carried out by the customer.

NATURAL
ANODISED
POWDER-
COATED

ALUMINIUM



INSTALLATION

Choose the angle profile size according to the thickness of the tile. Apply with a suitable notched trowel the tile adhesive to area to be tiled. Cover the perforated flange of the trim with tile adhesive, press the tile firmly into the adhesive bed and align it correctly.

TILE ANGLE PROFILE MADE OF ALUMINIUM

alferpro[®]

DELIVERY FORM

The profiles are available in heights:
2; 3; 4,5; 6; 8; 9; 10; 11; 12,5; 15; 16,5; 17,5; 18,5;
20; 22; 25; 30mm
depending on the surface (see catalog).

The profiles are available in lengths:
100; 250; 300cm
depending on the surface (see catalog).

SURFACES

Natural, anodised, powdercoated

PACKING UNIT

PU 1 = 10 pcs, PU 2 = 50 pcs, PU 3 = 150 pcs

PROCESSING, CARE, CLEANING

The following points must be observed in order to prevent damage on the profiles surfaces:

- The processing instructions of the tile adhesive must always be observed.
- Any excess of grout, mortar and tile adhesive on the profile surface should be removed immediately with water.
- Allow to dry out thoroughly, ensuring the area is well ventilated.
- The protective film or similar, used for the installation, can only be removed after the paving has dried completely.
- The profiles are cleaned with a damp cloth and pH-neutral agents..

MATERIAL PROPERTIES

Aluminium angle profiles and are suitable on both indoor and outdoor areas and can bear low to medium mechanical solicitations. The material has good corrosion resistance and a high tolerance and endurance to chemicals.

STORAGE AND TRANSPORT

The profiles must be protected against external and environmental threats.

DISPOSAL

The profiles can be delivered to authorized aluminium recycling centers.

SPECIAL NOTE

Warranty and disclaimer

The application examples and tips shown in this data sheet and on our website are guidelines based on conventional crafting techniques. All information, including product-related information is standard. The author excludes any warranty for the information given in the data sheet and on the website. For the usability of products for specific purposes and for the occurrence of damage or the occurrence of defects by the information or tips given here, no warranty is also accepted. Errors, misprints and technical changes - as far as they serve the progress - reserved. Photos and illustrations are not binding. No liability for printing and image defects. Imitation and reprinting, even in part, is not permitted.

As of: 06/2023

alferpro[®]

Industriestrasse 7 · 79793 Wutoeschingen · Germany
Tel +49 7746 92 01 500 · Fax +49 7746 92 01 85 00
info.eng@alferpro.com · www.alferpro.com

alferbasic_AB_A_en_0623