


# alferstyle

LISTELLI PROFILE  
MADE OF STAINLESS STEEL

# alferpro®

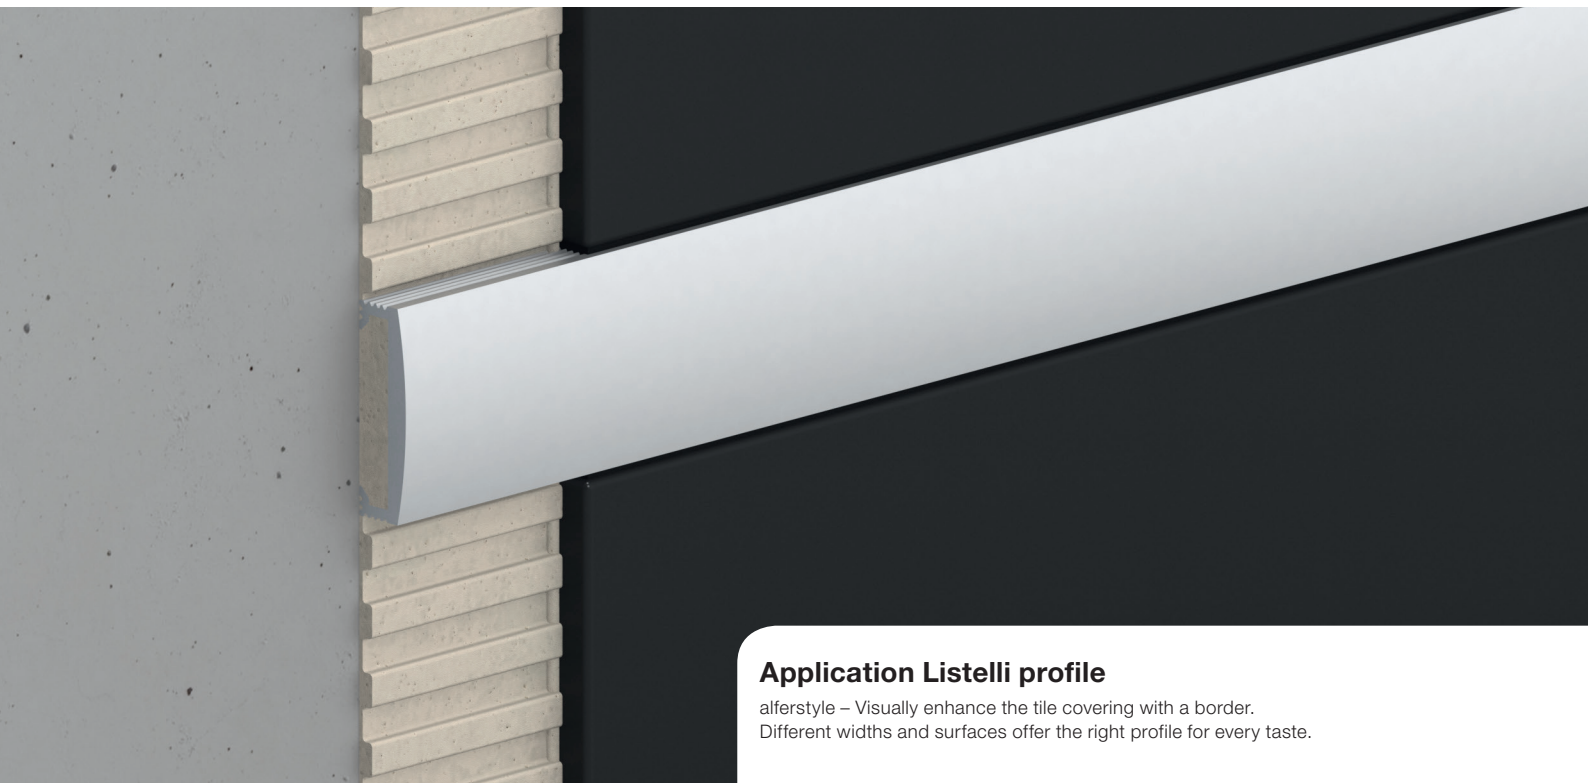

## Application Listelli profile

alferstyle – Visually enhance the tile covering with a border.  
Different widths and surfaces offer the right profile for every taste.

## PROVE YOUR STYLE WITH DECORATIVE PROFILES FROM THE ALFERSTYLE SERIES.


Choose the matching decor for any environment from a wide range of different materials, surfaces and colours. Clear shapes accentuate the high-quality materials. Give spaces your personal character from modern simplicity to timeless classics.

BRUSHED  
(240K)

POLISHED

CHECK  
PATTERN

**STAINLESS STEEL  
V2A AND V4A**



## TECHNICAL SPECIFICATIONS

Stainless steel 1.4301 / X5CrNi18-10  
Material number: 1.4301

All measures, weights and loads as indicated in this data sheet are approximate figures. We can not assume liability for any special applications as well as damage resulting from improper assembly or use, a corresponding suitability test must always be carried out by the customer.

## INSTALLATION

Apply with a suitable notched trowel the tile adhesive to area to be tiled. Press in and align the listelli profile in the damp tile adhesive, then press the tile firmly into the adhesive bed and align it correctly.

### DELIVERY FORM

The profiles are available in widths:  
25; 40 mm  
depending on the surface (see catalog).

The profiles are available in heights:  
6 mm  
depending on the surface (see catalog).

The profiles are available in lengths:  
250 cm  
depending on the surface (see catalog).

### SURFACES

Brushed (240K), polished, check pattern

### PACKING UNIT

PU 1 = 10 pcs, PU 2 = 50 pcs, PU 3 = 150 pcs

### PROCESSING, CARE, CLEANING

The following points must be observed in order to prevent damage on the profiles surfaces:

- The processing instructions of the tile adhesive must always be observed.
- Any excess of grout, mortar and tile adhesive on the profile surface should be removed immediately with water.
- Allow to dry out thoroughly, ensuring the area is well ventilated.
- The protective film or similar, used for the installation, can only be removed after the paving has dried completely.
- The profiles are cleaned with a damp cloth and pH-neutral cleaning agents. Stubborn dirt on the profiles can also be removed with solvents.

### MATERIAL PROPERTIES

Stainless steel listelli profiles are suitable on both indoor and outdoor areas and can bear medium to high mechanical solicitations. The material has a high tolerance and endurance to chemicals. Stainless steel ensures excellent resistance to corrosion, so it is ideal in the food, chemical, hospital and high transit areas.

### STORAGE AND TRANSPORT

The profiles must be protected against external and environmental threats.

### DISPOSAL

The profiles can be delivered to authorized steel recycling centers.

### SPECIAL NOTE

#### Warranty and disclaimer

The application examples and tips shown in this data sheet and on our website are guidelines based on conventional crafting techniques. All information, including product-related information is standard. The author excludes any warranty for the information given in the data sheet and on the website. For the usability of products for specific purposes and for the occurrence of damage or the occurrence of defects by the information or tips given here, no warranty is also accepted. Errors, misprints and technical changes - as far as they serve the progress - reserved. Photos and illustrations are not binding. No liability for printing and image defects. Imitation and reprinting, even in part, is not permitted.

As of: 05/2020