

# alferline

SLOPE WEDGE  
MADE OF STAINLESS STEEL

# alferpro®



## Application slope wedge

alferline – The one-piece gradient wedge connects the level pavement with the two-percent gradient of line drainage systems and is available in right and left versions.

## TECHNICAL SPECIFICATIONS

Stainless steel V2A 1.4301 / X5CrNi18-10

All information is approximate. Since we can not assume liability for special applications, a corresponding suitability test must always be carried out by the customer.

BRUSHED  
(240K)

POWDERCOATED


STAINLESS STEEL  
V2A



h1

## PROCESSING

As first step, select the matching alferbasic angle profile according to the tile thickness. Embed the angle profile into the wet tile adhesive and align it to the floor on the edge of the shower slope. Cover the fixing leg completely with adhesive. Press the tiles into the straight floor area and align them so that they match the top edge of the profile. Always allow for a joint.

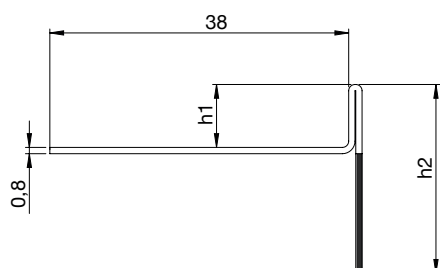

Profile length (cm)	h1 (mm)	h2 (mm)
98	8; 10; 11; 12,5	24
148	8; 10; 11; 12,5	32
200	10; 11; 12,5	40

### DELIVERY FORM

The slope wedge is available in right and left versions.

The profiles are available in heights:  
8mm  
available depending on the surface (see catalogue).

The profiles are available in lengths:  
100; 150; 200cm  
available depending on the surface (see catalogue).

### SURFACES

Brushed (240K)  
Powder-coated

### PACKING UNIT

PU = 1 pc

### PROCESSING, CARE, CLEANING

The following points must be observed in order to prevent damage on the profiles surfaces:

- The processing instructions of us and the tile adhesive must always be observed.
- Any excess of grout, mortar and tile adhesive on the profile surface should be removed immediately with water.
- Allow to dry out thoroughly, ensuring the area is well ventilated.
- Cover the covering with a protective foil or similar only after the mortar has completely set.
- The profiles are cleaned with a damp cloth and pH-neutral agents.
- To cut the profiles to length, we recommend a low-speed angle grinder with a special cutting disc for stainless steel.

### MATERIAL PROPERTIES

Stainless steel slope wedge are suitable for medium to high mechanical loads in indoor and outdoor areas and have a high resistance to chemicals. They are often used in the food industry, in hospitals and swimming pools, etc.

### STORAGE AND TRANSPORT

The profiles should be protected against external impact and abrasion.

### DISPOSAL

The profiles can be supplied to steel recycling.

### SPECIAL NOTE

#### Warranty and disclaimer

The application examples and tips shown in this data sheet and on our website are guidelines based on conventional crafting techniques. All information, including product-related information is standard. The author excludes any warranty for the information given in the data sheet and on the website. For the usability of products for specific purposes and for the occurrence of damage or the occurrence of defects by the information or tips given here, no warranty is also accepted. Errors, misprints and technical changes - as far as they serve the progress - reserved. Photos and illustrations are not binding. No liability for printing and image defects. Imitation and reprinting, even in part, is not permitted.

As of: 04/2025