


alferline

SLOPE WEDGE
MADE OF STAINLESS STEEL

alferpro®

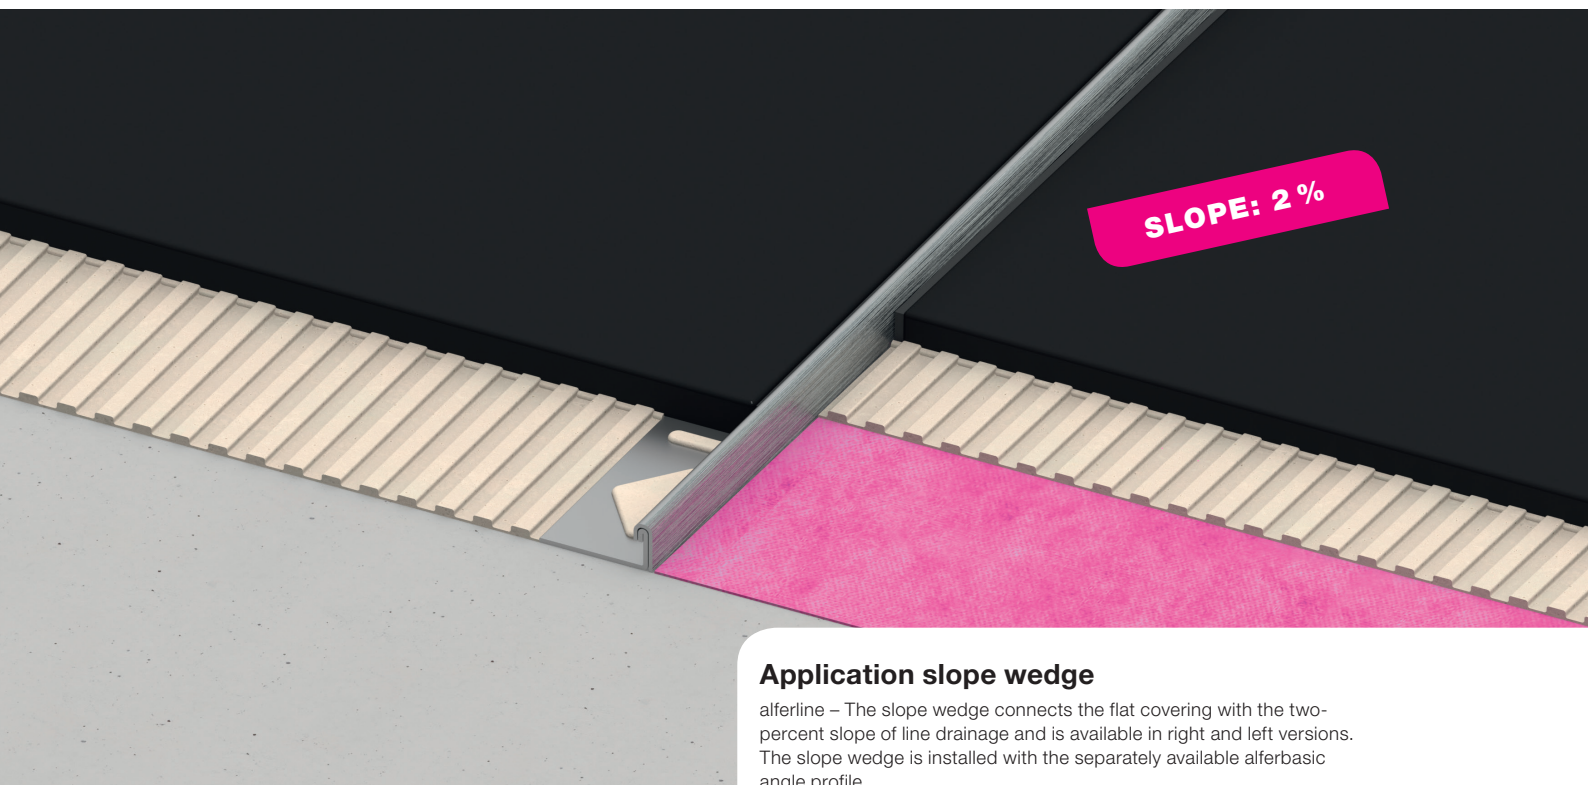

Application slope wedge

alferline – The slope wedge connects the flat covering with the two-percent slope of line drainage and is available in right and left versions. The slope wedge is installed with the separately available alferbasic angle profile.


TECHNICAL SPECIFICATIONS

Stainless steel 1.4301 / X5CrNi18-10
Material number: 1.4301

All information is approximate. Since we can not assume liability for special applications, a corresponding suitability test must always be carried out by the customer.

BRUSHED
(240K)

STAINLESS STEEL
V2A



PROCESSING

As first step, select the matching alferbasic angle profile according to the tile thickness. Embed the angle profile into the tile adhesive and align it to the floor on the edge of the shower slope. Apply tile adhesive to the straight area to lay the tiles. Cut to length the slope wedge as required and insert it into the angle profile. The slope can then be tiled.

DELIVERY FORM

The slope wedge is available in right and left versions.

The profiles are available in heights:
8mm
(see catalog).

The profiles are available in lengths:
100; 150; 200cm
(see catalog).

• PROCESSING, CARE, CLEANING

The following points must be observed in order to prevent damage on the profiles surfaces:

- The processing instructions of the tile adhesive must always be observed.
- Any excess of grout, mortar and tile adhesive on the profile surface should be removed immediately with water.
- Allow to dry out thoroughly, ensuring the area is well ventilated.
- The protective film or similar, used for the installation, can only be removed after the paving has dried completely.
- The profiles are cleaned with a damp cloth and pH-neutral agents. Stubborn dirt on the profiles can also be removed with solvents.

STORAGE AND TRANSPORT

The profiles should be protected against external impact and abrasion.

SPECIAL NOTE

Warranty and disclaimer

The application examples and tips shown in this data sheet and on our website are guidelines based on conventional crafting techniques. All information, including product-related information is standard. The author excludes any warranty for the information given in the data sheet and on the website. For the usability of products for specific purposes and for the occurrence of damage or the occurrence of defects by the information or tips given here, no warranty is also accepted. Errors, misprints and technical changes - as far as they serve the progress - reserved. Photos and illustrations are not binding. No liability for printing and image defects. Imitation and reprinting, even in part, is not permitted.

As of: 05/2020

SURFACES

Brushed (240K)

PACKING UNIT

PU 1 = 10 pcs, PU 2 = 50 pcs, PU 3 = 150 pcs

MATERIAL PROPERTIES

Stainless steel slope wedge are suitable for medium to high mechanical loads in indoor and outdoor areas and have a high resistance to chemicals. They are often used in the food industry, in hospitals and swimming pools, etc.

DISPOSAL

The profiles can be supplied to steel recycling.