


alfercurve

PLIABLE ANGLE PROFILE
MADE OF STAINLESS STEEL

alferpro®

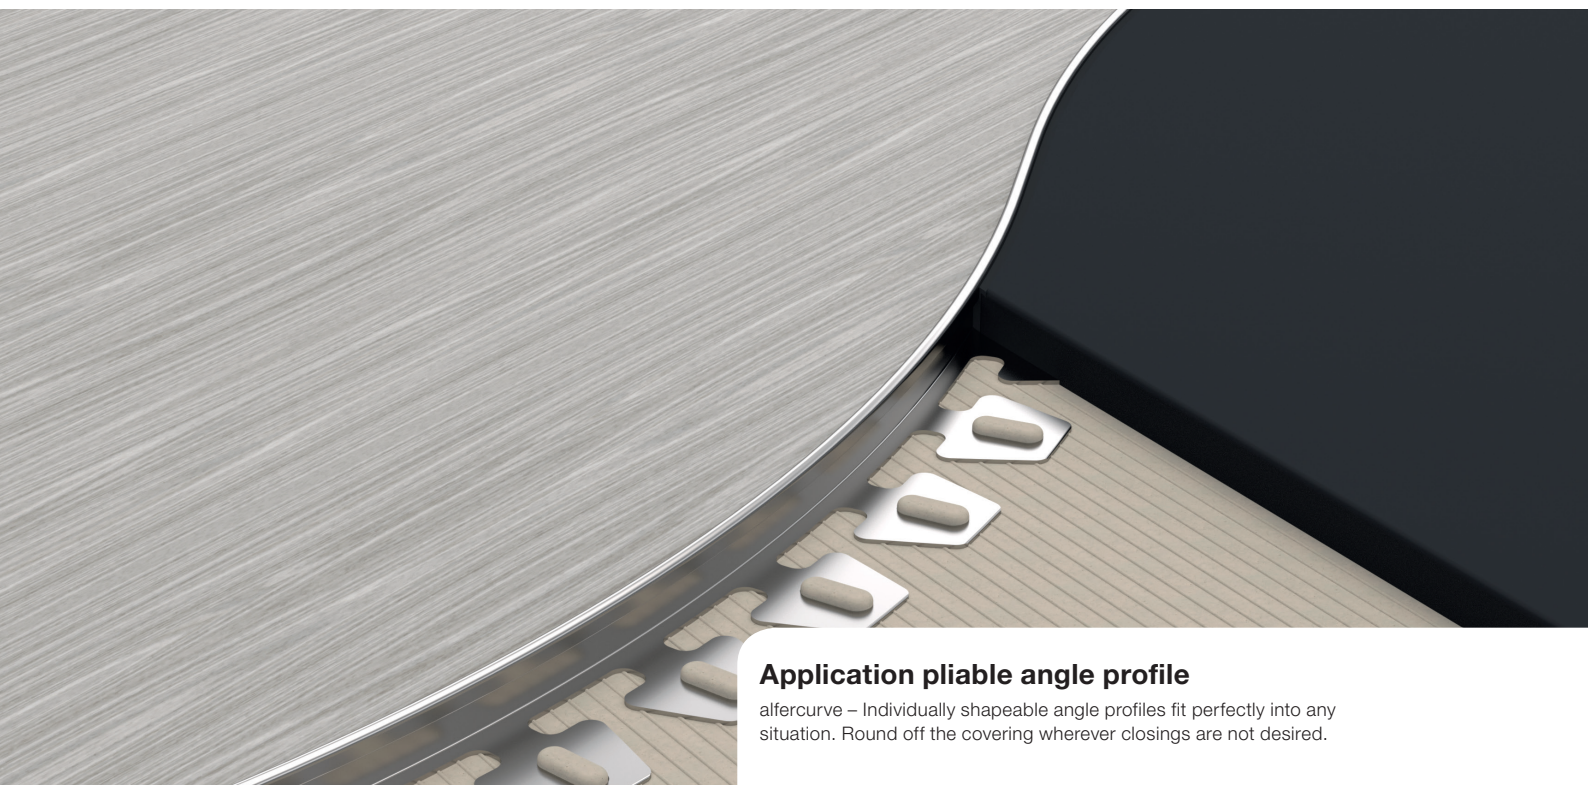

Application pliable angle profile

alfercurve – Individually shapeable angle profiles fit perfectly into any situation. Round off the covering wherever closings are not desired.

ENLIVEN THE DESIGN OF TILE COVERINGS.

alfercurve profiles are flexible, thanks to their special die-cutting. They adapt to your individual curve guide. Transitions with elegant rounding can be implemented easily. The series includes profiles with a height of 2 mm to 30 mm. Get creative with alfercurve!

GLOSSY

STAINLESS STEEL
V2A



TECHNICAL SPECIFICATIONS

Stainless steel V2A 1.4301 / X5CrNi18-10

All information is approximate. Since we can not assume liability for special applications, a corresponding suitability test must always be carried out by the customer.

PROCESSING

Choose the pliable angle profile according to the tile thickness. Apply the tile adhesive to the edge of the surface to be tiled with a notched trowel. Press in and align the pliable angle profile in the damp tile adhesive. Cover the attachment leg completely with glue. Press in and align the tile so that it matches the top of the profile.

DELIVERY FORM

The profiles are available in heights:
3; 4,5; 6; 8; 9; 10; 11; 12,5mm
depending on the surface (see catalog).

The profiles are available in lengths:
250 cm
depending on the surface (see catalog).

SURFACES

Glossy

PACKING UNIT

PU 1 = 10 pcs, PU 2 = 50 pcs, PU 3 = 150 pcs

PROCESSING, CARE, CLEANING

The following points must be observed in order to prevent damage on the profiles surfaces:

- The processing instructions of the tile adhesive must always be observed.
- Any excess of grout, mortar and tile adhesive on the profile surface should be removed immediately with water.
- Allow to dry out thoroughly, ensuring the area is well ventilated.
- The protective film or similar, used for the installation, can only be removed after the paving has dried completely.
- The profiles are cleaned with a damp cloth and pH-neutral agents.
- To cut the profiles to length, we recommend a low-speed angle grinder with a special cutting disc for stainless steel.

MATERIAL PROPERTIES

Stainless steel pliable angle profiles are suitable for medium to high mechanical loads in indoor and outdoor areas and have a high resistance to chemicals. They are often used in the food industry, in hospitals and swimming pools, etc.

STORAGE AND TRANSPORT

The profiles should be protected against external impact and abrasion.

DISPOSAL

The profiles can be supplied to steel recycling.

SPECIAL NOTE

Warranty and disclaimer

The application examples and tips shown in this data sheet and on our website are guidelines based on conventional crafting techniques. All information, including product-related information is standard. The author excludes any warranty for the information given in the data sheet and on the website. For the usability of products for specific purposes and for the occurrence of damage or the occurrence of defects by the information or tips given here, no warranty is also accepted. Errors, misprints and technical changes - as far as they serve the progress - reserved. Photos and illustrations are not binding. No liability for printing and image defects. Imitation and reprinting, even in part, is not permitted.

As of: 08/2023