


SEALING – ISOLATING – DRAINING

The drainage mat ensures reliable drainage in outdoor areas. The mat is laid under the drainage screed or loosely on the gravel/crushed stone bed. The dimensionally stable dimpled structure ensures that the drainage space is permanent.

MAGENTA


PLASTIC
HDPE



TECHNICAL SPECIFICATIONS

Mat thickness: approx. 8 mm
Material: Plastic HDPE
Weight: approx. 600 g/m²
Roll width: 1 m
Roll length: 15 m
Pressure resistance: max. 240 kN/m² (24 t/m²)
Drainage performance in accordance with EN ISO 12958

MATERIAL: PLASTIC HDPE

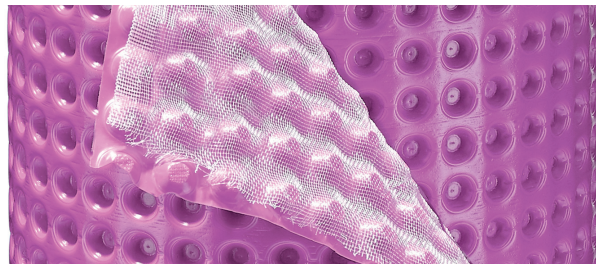

All information is approximate. Since we can not assume liability for special applications, a corresponding suitability test must always be carried out by the customer.

LAYING

The drainage mat with the reticulated fabric facing upwards is unrolled onto the structural sealing. In case of transversal laying, the reticulated fabric is folded for at least three rows of knobs and overlapped on the nodes. In case of longitudinal laying it is possible to use the stackable edge (7cm). If the overlapping is done correctly, no water can get under the drainage mat. Subsequently, the gravel/grit bed or the draining substrate is applied in to layers of corresponding thickness. Finally, depending on the surface covering, the sheets are then applied or glued either loosely or with an appropriate method.

DELIVERY FORM

The drainage mat is available in size
1 m width x 15 m length
(see catalog).

PACKING UNIT

Pieces = 1 roll, pallet = 9 rolls

SCOPE OF APPLICATION

Suitable for installation in damp and wet rooms, indoors and outdoors. Processing within 24 months from date of shipment.

SPECIFICATIONS

- Quick and simple processing
- Maximum laying safety
- Ideal for renovation measures
- Protects against crack formation in top covering
- High shear elasticity

STORAGE AND TRANSPORT

The sealing sheet should be protected against external impact and abrasion. Store dry and at room temperature, protect from direct sunlight.

DISPOSAL

The drainage mat can be supplied to plastic recycling.

SPECIAL NOTE

Warranty and disclaimer

The application examples and tips shown in this data sheet and on our website are guidelines based on conventional crafting techniques. All information, including product-related information is standard. The author excludes any warranty for the information given in the data sheet and on the website. For the usability of products for specific purposes and for the occurrence of damage or the occurrence of defects by the information or tips given here, no warranty is also accepted. Errors, misprints and technical changes - as far as they serve the progress - reserved. Photos and illustrations are not binding. No liability for printing and image defects. Imitation and reprinting, even in part, is not permitted.

As of: 05/2019