


alferline

SHOWER SCREEN PANELS
MADE OF STAINLESS STEEL

alferpro®

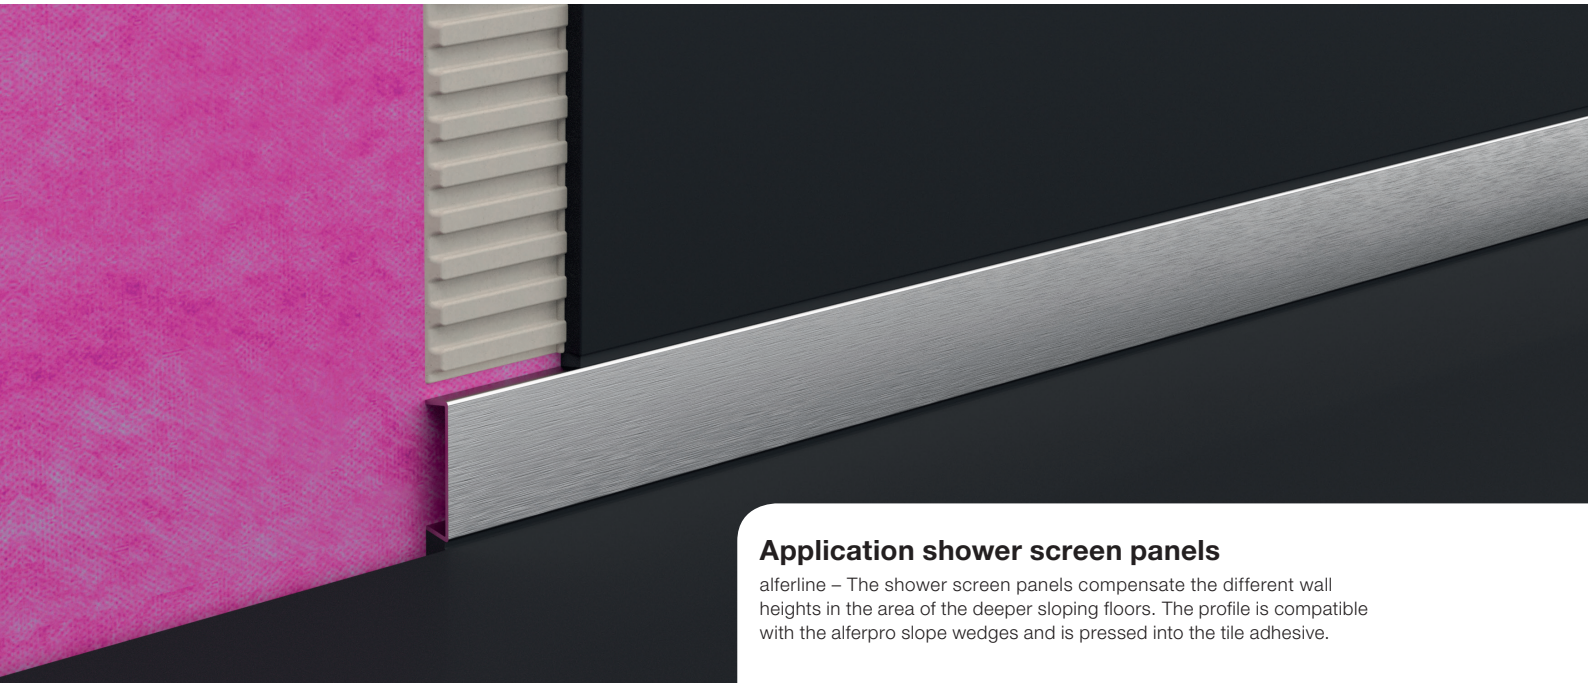

Application shower screen panels

alferline – The shower screen panels compensate the different wall heights in the area of the deeper sloping floors. The profile is compatible with the alferpro slope wedges and is pressed into the tile adhesive.

TECHNICAL SPECIFICATIONS

Stainless steel V2A 1.4301 / X5CrNi18-10

All information is approximate. Since we can not assume liability for special applications, a corresponding suitability test must always be carried out by the customer.

PROCESSING

Cut the shower screen panel to the correct length.
Press the profile into the damp adhesive bed. Align the profile parallel and level to the upper edge of the tile. Always allow for a joint./s.


BRUSHED
(240K)

POWDER-
COATED

**STAINLESS STEEL
V2A**



INOX
STAINLESS STEEL



DELIVERY FORM

The profiles are available in heights:
6 mm
(see catalog).

The profiles are available in widths of:
25; 30 mm
available (see catalogue).

The profiles are available in lengths:
100; 150 cm
(see catalog).

PROCESSING, CARE, CLEANING

The following points must be observed in order to prevent damage on the profiles surfaces:

- The processing instructions of us and the tile adhesive must always be observed.
- Any excess of grout, mortar and tile adhesive on the profile surface should be removed immediately with water.
- Allow to dry out thoroughly, ensuring the area is well ventilated.
- Cover the covering with a protective foil or similar only after the mortar has completely set.
- The profiles are cleaned with a damp cloth and pH-neutral agents.
- To cut the profiles to length, we recommend a low-speed angle grinder with a special cutting disc for stainless steel.

SURFACES

Brushed (240K)
Powder-coated

PACKING UNIT

PU = 1 pc

MATERIAL PROPERTIES

Stainless steel slope wedge are suitable for medium to high mechanical loads in indoor and outdoor areas and have a high resistance to chemicals. They are often used in the food industry, in hospitals and swimming pools, etc.

STORAGE AND TRANSPORT

The profiles should be protected against external impact and abrasion.

DISPOSAL

The profiles can be supplied to steel recycling.

SPECIAL NOTE

Warranty and disclaimer

The application examples and tips shown in this data sheet and on our website are guidelines based on conventional crafting techniques. All information, including product-related information is standard. The author excludes any warranty for the information given in the data sheet and on the website. For the usability of products for specific purposes and for the occurrence of damage or the occurrence of defects by the information or tips given here, no warranty is also accepted. Errors, misprints and technical changes - as far as they serve the progress - reserved. Photos and illustrations are not binding. No liability for printing and image defects. Imitation and reprinting, even in part, is not permitted.

As of: 04/2025