

Glass slope wedge

alferline – With the one-piece glass slope wedge, glass partitions are easily and cleanly connected with the two-percent slope of line drainage systems. Available as right and left version.

TECHNICAL SPECIFICATIONS

Stainless steel V2A 1.4301 / X5CrNi18-10

All information is approximate. Since we can not assume liability for special applications, a corresponding suitability test must always be carried out by the customer.


BRUSHED (240K)

**STAINLESS STEEL
V2A**



PROCESSING

Press the glass slope wedge of the correct length (always cut off at the higher side) with the perforated fixing leg into the adhesive and align it. Cover the fixing leg completely with adhesive. Press in and align the tiles in the straight floor area so that they are aligned with the upper edge of the profile. Always allow for a joint. For glass installation, fill the profile completely with silicone, insert the glass pane and peel off excess silicone.

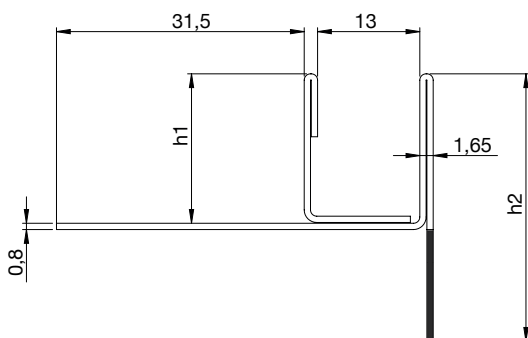

Profile length (cm)	h1 (mm)	h2 (mm)
98	19	34
120	19	37
148	19	42
200	19	60

DELIVERY FORM

The profiles are available in heights:
19 mm.

The profiles are available in the lengths:
98; 120; 148; 200 cm, depending on the surface
(see catalogue).

SURFACES

Brushed (240K)
Powder-coated

PACKING UNIT

PU 1 = 1 pc

PROCESSING, CARE, CLEANING

The following points must be observed in order to prevent damage on the profiles surfaces:

- The processing instructions of us and the tile adhesive must always be observed.
- Any excess of grout, mortar and tile adhesive on the profile surface should be removed immediately with water.
- Allow to dry out thoroughly, ensuring the area is well ventilated.
- Cover the covering with a protective foil or similar only after the mortar has completely set.
- The profiles are cleaned with a damp cloth and pH-neutral agents.
- To cut the profiles to length, we recommend a low-speed angle grinder with a special cutting disc for stainless steel.

MATERIAL PROPERTIES

Stainless steel glass slope wedges are suitable for medium to high mechanical loads indoors and outdoors and have a high resistance to chemicals. They are often used in the food industry, hospitals and swimming pools, etc.
Some of the profiles are also available in V4A (see catalogue).
These are even more resistant to aggressive chemicals.

STORAGE AND TRANSPORT

The profiles should be protected against external impact and abrasion.

DISPOSAL

The profiles can be supplied to steel recycling.

SPECIAL NOTE

Warranty and disclaimer

The application examples and tips shown in this data sheet and on our website are guidelines based on conventional crafting techniques. All information, including product-related information is standard. The author excludes any warranty for the information given in the data sheet and on the website. For the usability of products for specific purposes and for the occurrence of damage or the occurrence of defects by the information or tips given here, no warranty is also accepted. Errors, misprints and technical changes - as far as they serve the progress - reserved. Photos and illustrations are not binding. No liability for printing and image defects. Imitation and reprinting, even in part, is not permitted.

As of: 10/2023