


# alferstep

## FLORENTINE STEP EDGE PROFILE AND ACCESSORIES MADE OF ALUMINIUM

# alferpro®

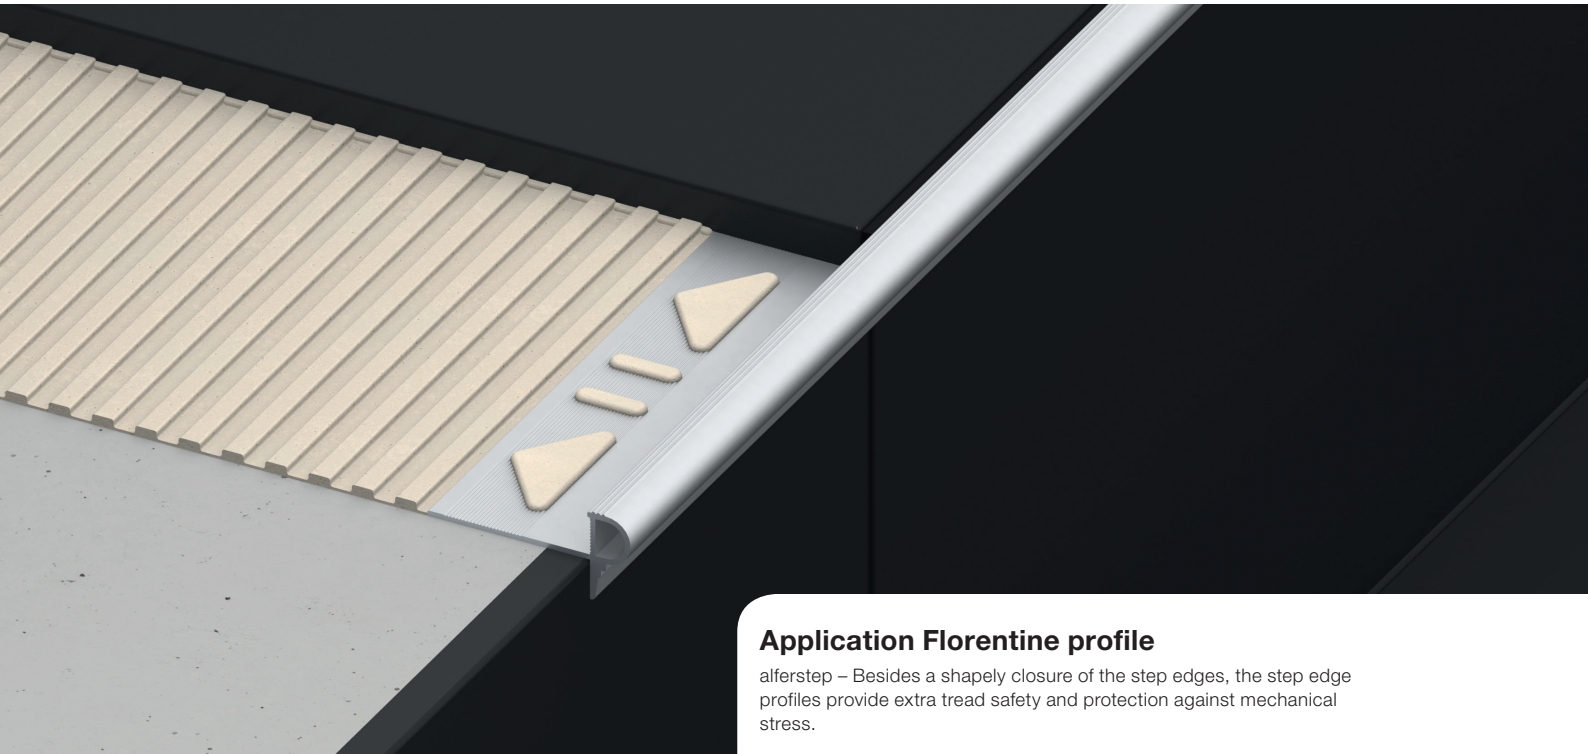

### Application Florentine profile

alferstep – Besides a shapely closure of the step edges, the step edge profiles provide extra tread safety and protection against mechanical stress.

### FORM MEETS FUNCTION: STYLE ELEMENT AND SAFETY FACTOR AT ONCE.

Stairs are a defining design element in architecture. The steps provide creative transitions and structure to the space. alferstep combines visual requirements with functional needs. Step edge profiles increase tread safety and protect the edge at the same time against mechanical stresses.

### TECHNICAL SPECIFICATIONS

AlMgSi0,5  
Material number: 33.206


All information is approximate. Since we can not assume liability for special applications, a corresponding suitability test must always be carried out by the customer.

### PROCESSING

Choose the florentine profile according to the tile thickness. Apply the tile adhesive to the edge of the surface to be tiled with a notched trowel. Press in and align the florentine profile in the damp tile adhesive. Cover the attachment leg completely with glue. Press in and align the tile so that it matches the top of the profile.

ANODISED


ALUMINIUM



### ACCESSORIES

ANODISED

ALUMINIUM

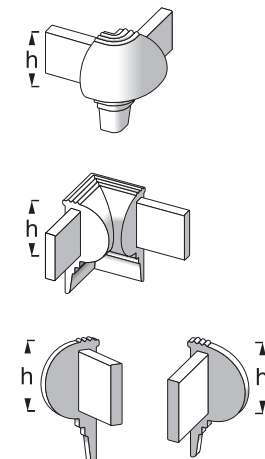

## FLORENTINE STEP EDGE PROFILE AND ACCESSORIES MADE OF ALUMINIUM

---

### DELIVERY FORM

The profiles are available in heights:  
8; 10; 11; 12,5mm  
depending on the surface (see catalog).

The profiles are available in lengths:  
150; 250cm  
depending on the surface (see catalog).

The accessories are available in heights:  
8; 10; 11; 12,5mm  
depending on the surface (see catalog).

### SURFACES

Anodised

### PACKING UNIT

Profiles  
PU 1 = 10 pcs, PU 2 = 50 pcs, PU 3 = 150 pcs

Accessories  
Blister = 2 pcs

### PROCESSING, CARE, CLEANING

The following points must be observed in order to prevent damage on the profiles surfaces:

- The processing instructions of the tile adhesive must always be observed.
- Any excess of grout, mortar and tile adhesive on the profile surface should be removed immediately with water.
- Allow to dry out thoroughly, ensuring the area is well ventilated.
- The protective film or similar, used for the installation, can only be removed after the paving has dried completely.
- The profiles are cleaned with a damp cloth and pH-neutral agents. Please do not use alkaline detergents.

### MATERIAL PROPERTIES

Aluminium florentine profiles and accessories are suitable for low to medium mechanical loads in indoor and outdoor areas and have a high resistance to chemicals.

### STORAGE AND TRANSPORT

The profiles and accessories should be protected against external impact and abrasion.

### DISPOSAL

The profiles and accessories can be supplied to aluminium recycling.

### SPECIAL NOTE

#### Warranty and disclaimer

The application examples and tips shown in this data sheet and on our website are guidelines based on conventional crafting techniques. All information, including product-related information is standard. The author excludes any warranty for the information given in the data sheet and on the website. For the usability of products for specific purposes and for the occurrence of damage or the occurrence of defects by the information or tips given here, no warranty is also accepted. Errors, misprints and technical changes - as far as they serve the progress - reserved. Photos and illustrations are not binding. No liability for printing and image defects. Imitation and reprinting, even in part, is not permitted.

As of: 05/2020