


alferbal

BALCONY ANGLE PROFILE AND ACCESSORIES MADE OF ALUMINIUM

alferpro®

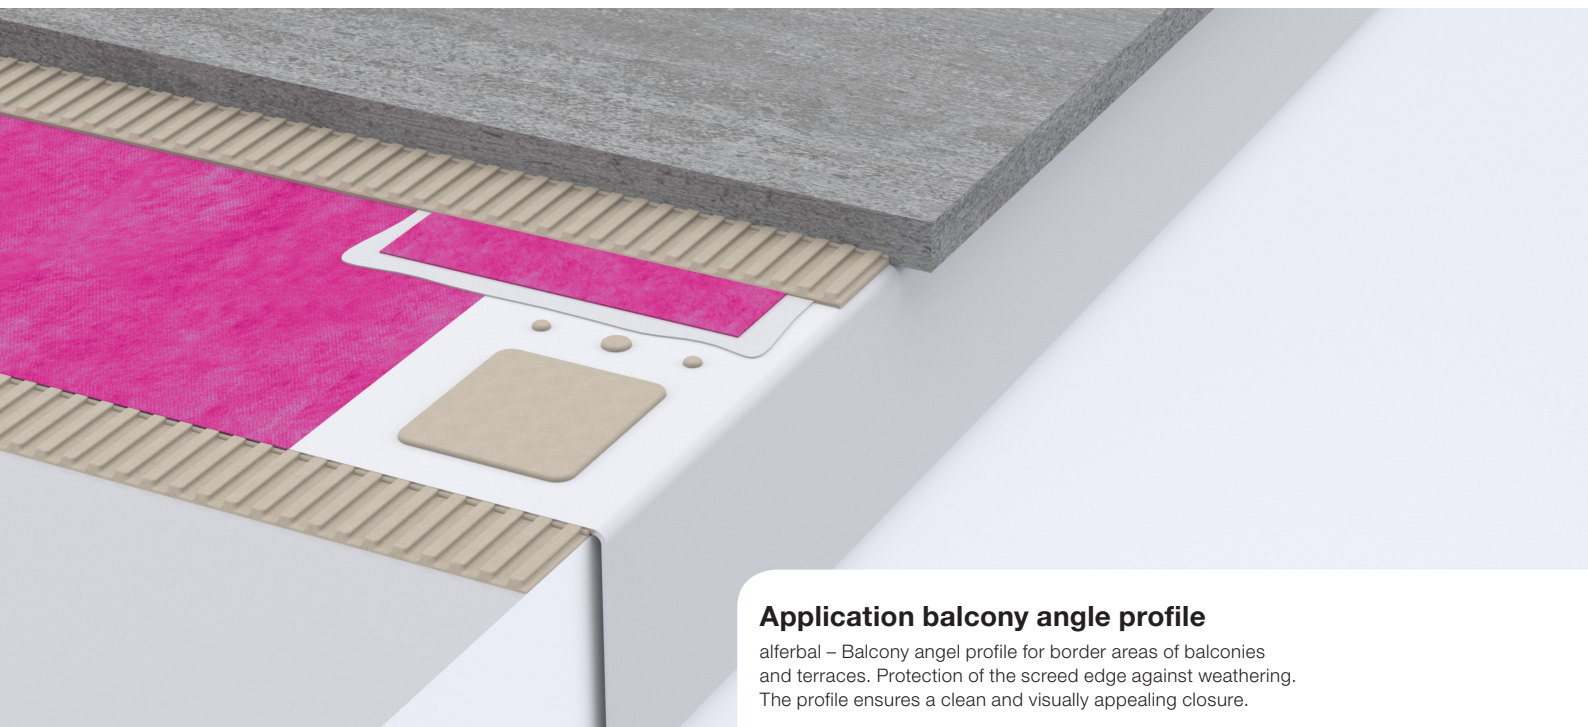

Application balcony angle profile

alferbal – Balcony angle profile for border areas of balconies and terraces. Protection of the screed edge against weathering. The profile ensures a clean and visually appealing closure.

DESIGNED TO MEET THE SPECIAL REQUIREMENTS ON TERRACES AND BALCONIES.

Designed with ruggedness in mind, alferbal series defy any weather. Regardless of whether in new construction or for a subsequent renovation, the profiles protect the sensitive border areas effectively against rain and storms.

TECHNICAL SPECIFICATIONS

Alloy: EN AW 5754 (AlMg3)
Material number: 3.3535


All measures, weights and loads as indicated in this data sheet are approximate figures. We can not assume liability for any special applications as well as damage resulting from improper assembly or use, a corresponding suitability test must always be carried out by the customer.

PROCESSING

Choose the balcony angle profile according to the floor screed thickness. Apply the tile adhesive to the surface to be tiled with a notched trowel. Press in and align the balcony angle profile in the damp tile adhesive. Cover the attachment leg completely with glue. Press in and align the tile so that it matches the front of the profile.

POWDER-COATED

ALUMINIUM



CORNER PIECE

POWDER-COATED


ALUMINIUM



CONNECTOR

POWDER-COATED

ALUMINIUM



BALCONY ANGLE PROFILE AND ACCESSORIES MADE OF ALUMINIUM

DELIVERY FORM

The profiles are available in heights:
40; 55; 75; 95mm
depending on the surface (see catalog).

The profiles are available in lengths:
300 cm
depending on the surface (see catalog).

The accessories are available in heights:
40; 55; 75; 95mm
depending on the surface (see catalog).

SURFACES

Powder-coated

PACKING UNIT

Profiles:
PU 1 = 10 pcs, PU 2 = 50 pcs, PU 3 = 150 pcs

Accessories:
Blister = 1 pc

• PROCESSING, CARE, CLEANING

The following points must be observed in order to prevent damage on the profiles surfaces:

- Our processing instructions and of the tile adhesive must always be observed.
- Any excess of grout, mortar and tile adhesive on the profile surface should be removed immediately with water.
- The protective film or similar, used for the installation, can only be removed after the paving has dried completely.
- The profiles are cleaned with a damp cloth and pH-neutral agents.

MATERIAL PROPERTIES

Aluminium steel tile profiles are suitable for high mechanical loads and are largely resistant to chemicals.

STORAGE AND TRANSPORT

The profiles should be protected against external impact and abrasion.

DISPOSAL

The profiles can be supplied to aluminium recycling.

SPECIAL NOTE

Warranty and disclaimer

The application examples and tips shown in this data sheet and on our website are guidelines based on conventional crafting techniques. All information, including product-related information is standard. The author excludes any warranty for the information given in the data sheet and on the website. For the usability of products for specific purposes and for the occurrence of damage or the occurrence of defects by the information or tips given here, no warranty is also accepted. Errors, misprints and technical changes - as far as they serve the progress - reserved. Photos and illustrations are not binding. No liability for printing and image defects. Imitation and reprinting, even in part, is not permitted.

As of: 06/2023