


# alferlight

## LED STEP EDGE PROFILE ALFERPROSTEP MADE OF ALUMINIUM

# alferpro®

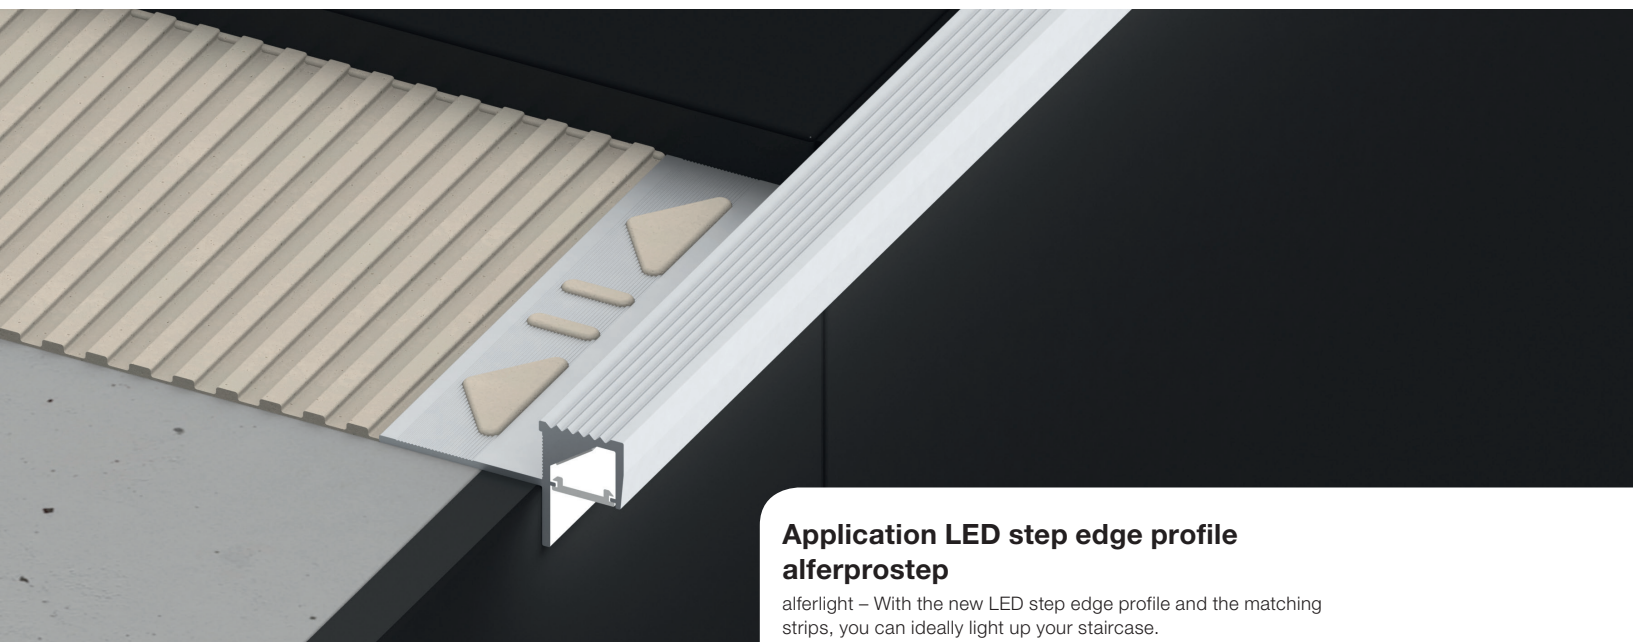

### Application LED step edge profile alferprostep

alferlight – With the new LED step edge profile and the matching strips, you can ideally light up your staircase.


### LIGHTEN UP THE DARK AND ENSURE SAFETY IN A RELAXED ATMOSPHERE.

Light in the strict sense is not an element. Therefore, Light has a very strong impact on spacial effect. Today, LED technology allows almost unlimited freedom of design. Depending on the model, not only the brightness, but also the light colour can be smoothly controlled. The LED profiles are installed like classic tile profiles when laying the tiles in the covering. Cables and power supply are hidden under plaster or drywall.

### LED STEP EDGE PROFILE ALFERPROSTEP INCL. DIFFUSING DISC

ANODISED

ALUMINIUM



### TECHNICAL SPECIFICATIONS

AlMgSi0,5  
Material number: 33.206

All measures, weights and loads as indicated in this data sheet are approximate figures. We can not assume liability for any special applications as well as damage resulting from improper assembly or use, a corresponding suitability test must always be carried out by the customer.



### INSTALLATION

Choose the LED step edge profile alferprostep size according to the thickness of the tile. Apply with a suitable notched trowel the tile adhesive to area to be tiled. Cover the perforated flange of the trim with tile adhesive, press the tile firmly into the adhesive bed and align it correctly.

### ACCESSORIES

ANODISED

ALUMINIUM



### DELIVERY FORM

The profiles are available in the following heights:  
10; 11; 12,5mm

The profiles are available in the following lengths:  
250cm

The accessories are available in the following heights:  
10; 11; 12,5mm

The matching diffuser disc is included in the delivery.

### SURFACES

Anodised

### PACKING UNIT

Profiles  
PU 1 = 10 pcs, PU 2 = 50 pcs, PU 3 = 150 pcs

Accessories  
Blister = 1 pc

### PROCESSING, CARE, CLEANING

The following points must be observed in order to prevent damage on the profiles surfaces:

- The processing instructions of the tile adhesive must always be observed.
- Any excess of grout, mortar and tile adhesive on the profile surface should be removed immediately with water.
- Allow to dry out thoroughly, ensuring the area is well ventilated.
- The protective film or similar, used for the installation, can only be removed after the paving has dried completely.
- The profiles and accessories are cleaned with a damp cloth and pH-neutral cleaning agents. Please do not use alkaline products.

### MATERIAL PROPERTIES

Aluminium LED step edge profiles alferprostep and accessories are suitable on both indoor and outdoor areas and can bear low to medium mechanical solicitations. The material has good corrosion resistance and a high tolerance and endurance to chemicals.

### STORAGE AND TRANSPORT

The profiles and accessories must be protected against external and environmental threats.

### DISPOSAL

The profiles and accessories can be delivered to authorized aluminium recycling centers. The diffusing disc can be supplied to plastic recycling.

### SPECIAL NOTE

#### Warranty and disclaimer

The application examples and tips shown in this data sheet and on our website are guidelines based on conventional crafting techniques. All information, including product-related information is standard. The author excludes any warranty for the information given in the data sheet and on the website. For the usability of products for specific purposes and for the occurrence of damage or the occurrence of defects by the information or tips given here, no warranty is also accepted. Errors, misprints and technical changes - as far as they serve the progress - reserved. Photos and illustrations are not binding. No liability for printing and image defects. Imitation and reprinting, even in part, is not permitted.

As of: 05/2020