


alferline

GLASS PROFILES MADE OF ALUMINIUM

alferpro®

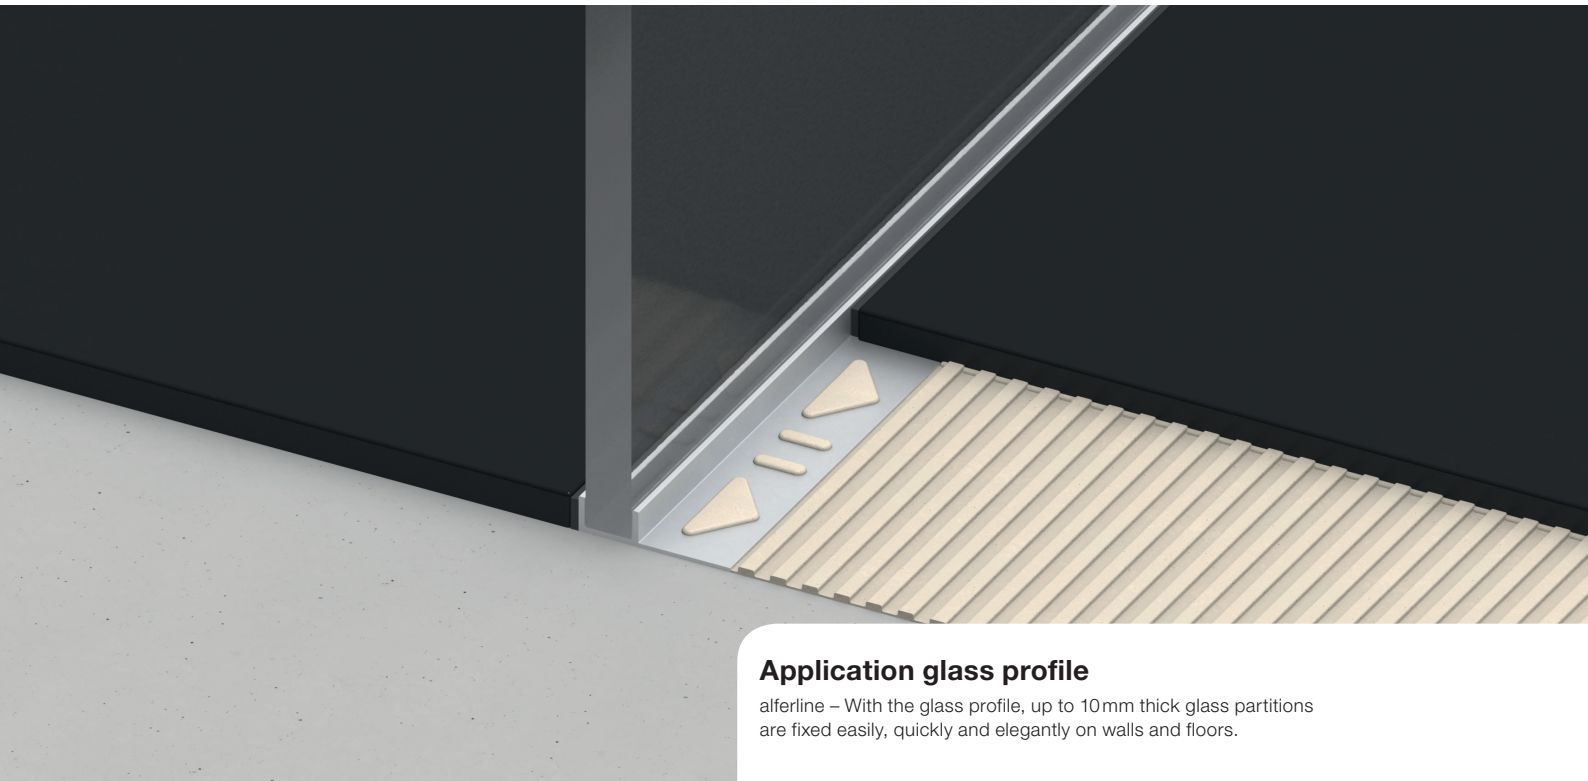

Application glass profile

alferline – With the glass profile, up to 10mm thick glass partitions are fixed easily, quickly and elegantly on walls and floors.


TECHNICAL SPECIFICATIONS

AlMgSi0,5
Material number: 33.206

All information is approximate. Since we can not assume liability for special applications, a corresponding suitability test must always be carried out by the customer.

ANODISED

ALUMINIUM



PROCESSING

Choose the glass profile according to the tile thickness. Apply the tile adhesive to the edge of the surface to be tiled with a notched trowel. Press in and align the glass profile in the damp tile adhesive. Cover the attachment leg completely with glue. Press in and align the tile so that it matches the top of the profile.

DELIVERY FORM

The profiles are available in heights:
8; 10; 12,5mm
(see catalog).

The profiles are available in lengths:
250 cm
(see catalog).

SURFACES

Anodised

PACKING UNIT

PU 1 = 10 pcs, PU 2 = 50 pcs, PU 3 = 150 pcs

PROCESSING, CARE, CLEANING

The following points must be observed in order to prevent damage on the profiles surfaces:

- The processing instructions of the tile adhesive must always be observed.
- Any excess of grout, mortar and tile adhesive on the profile surface should be removed immediately with water.
- Allow to dry out thoroughly, ensuring the area is well ventilated.
- The protective film or similar, used for the installation, can only be removed after the paving has dried completely.
- The profiles are cleaned with a damp cloth and pH-neutral agents.

MATERIAL PROPERTIES

Aluminium tile angle profiles are suitable for high mechanical loads and are largely resistant to chemicals.

STORAGE AND TRANSPORT

The profiles should be protected against external impact and abrasion.

DISPOSAL

The profiles can be supplied to aluminium recycling.

SPECIAL NOTE

Warranty and disclaimer

The application examples and tips shown in this data sheet and on our website are guidelines based on conventional crafting techniques. All information, including product-related information is standard. The author excludes any warranty for the information given in the data sheet and on the website. For the usability of products for specific purposes and for the occurrence of damage or the occurrence of defects by the information or tips given here, no warranty is also accepted. Errors, misprints and technical changes - as far as they serve the progress - reserved. Photos and illustrations are not binding. No liability for printing and image defects. Imitation and reprinting, even in part, is not permitted.

As of: 05/2020